

ANTI SLIP TREATMENT

- ✓ Safer when wet
- ✓ Does not peel
- ✓ Last up to 5 years
- ✓ Exceeds safety standards



ANTI SLIP FLOOR TREATMENT

Cyndan Anti Slip Treatment is not a coating. Therefore it will not delaminate, yellow, or wear off, as other coatings do. One application will last for up to 5 years even under high traffic.

When applied according to instructions, the treated floor surface when wet will comply with the Australian Standard safety level outlined in AS/NZS 4586:2004. (Wet Pendulum Test having mean BPN values between 45 - 70, Co-Efficient or Friction exceeding 0.6 for most areas).

Anti Slip Treatment is ideal for tiled applications in foyers, showers, bathrooms, kitchens, pool surrounds, commercial kitchens, food processing plants, hotels, hospitals, fitness clubs and any other 'slippery when wet' hard floor areas.

Use on Glazed ceramic tiles, vitrified tiles, polished granite, terrazzo, quarry tiles, concrete, slate, porcelain bath tubs, and other hard floor surfaces. Coverage varies depending on surface type. Concrete averages 5m²/litre, Ceramic/Vitrified Tiles average 7m²/litre whilst Marble/Granite average 10m²/litre.

Anti Slip Treatment should be applied by trained professionals to ensure safety standards are met.


Cyndan Micro Inviso Shield can also be used after applying Anti-Slip Treatment for those wanting to seal their tiles long term and prevent the surface from staining from oils, grease, blood, coffee and other contaminants.

SIZE:

1L, 5L, 25L, 205L

IDEAL FOR:

- Foyers
- Bathrooms
- Granite / Marble
- Terrazzo
- Food processing areas
- Public areas
- Bath tubs
- Pool surrounds

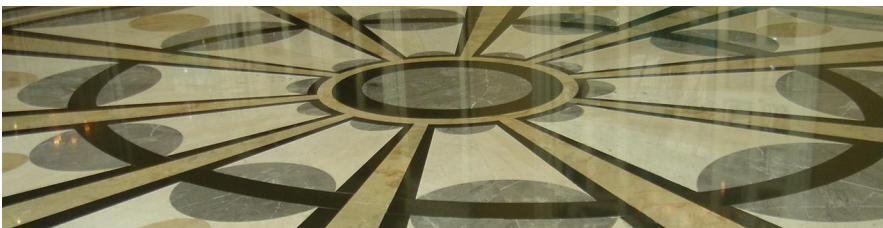

Chemical solutions across multiple industries
100% Australian owned - Est. 1978